



LED Wall Pack

Installation Instructions

| Product Model | Power (w) | Luminous efficacy |
|---------------|-----------|-------------------|
| FY-WP-A-060W | 60 | 110Lm/w |
| FY-WP-A-080W | 80 | 110Lm/w |
| FY-WP-B-100W | 100 | 110Lm/w |
| FY-WP-B-120W | 120 | 110Lm/w |

NOTE:

Please read this entire manual to fully understand and safety use this product
 Specifications are subject to change without notice
 please visit our we site the most recent user guide versions

UNPACKING:

1. Unpack and carefully examine the product
2. Report any damage and save all packing materials if any part(s) were damaged during shipping
3. Do not attempt to use this apparatus if it is damaged

IMPORANT SAFETY INFORMATION



READ ALL INSTRUCTIONS BEFORE INSTALLATION

1. Consult a qualified electrician to ensure correct branch circuit conductor.
 2. The product should be installed and operated by a qualified electrician or technician in accordance with relevant local codes
 3. Risk of electric shock, Ensure that main power source is off when wiring or soldering the sections of the product.
 4. Before installing this fixture or doing any maintenance, make sure to turn off the power supply at the circuit breaker or fuse box
 5. Check to make sure that all fixture connections have been properly made and the fixture is grounded to avoid potential electrical shocks.
6. Do not handle energized fixture when hands are wet, when standing on wet or damp surfaces, or in water.
- 7.7. This LED wall pack are normally set to work at extra low voltage below DC42V and constant current conditions to ensure safety to human body.
8. Designed for use in 100~240/277Vac (B1=L) or 200~480Vac(B1=U), protected circuit, supply wire(12-18AWG, stranded, 300V(B1=L)/600V(B1=H,U), 105°C rated). SELV equivalent control gear' Apply class 2 power supply.

INCLUDED IN THIS BOX

1. LED WallPack
2. Installation instruction

INSTALLATION INSTRUCTIONS

Step 1

Take off one screw on the heat sink (like figure 1)


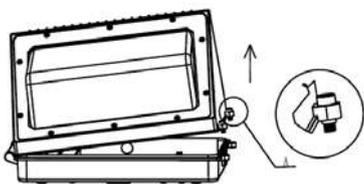


Figure 1

Step 2

There are 3 fixed holes on the bottom of light (like figure 2) Drilling these 3 holes

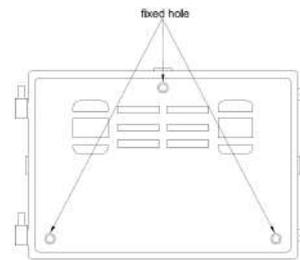

(Figure 2)

Step 3

Mark the hole position on the wall
 Fix light on the wall by 3 screws





Figure3

Step 4

There are 3 connect hole for AC wire, already open one hole on the right, connect with AC wire. (L: Black; N: white, E: Green)
 Or open other holes according to your requirements, and put the waterproof plate block off other holes.



(GREEN)
 ACL(BLACK)
 ACN(WHITE)

Step 5

Make sure all wire are connected correctly and lock the heat sink by screw.

