

## FY-GL-UFO-252W



UFO Grow Light



## SPECIFICATION

Model	FY-GL-UFO- 252W
Spectrum	Full Spectrum
Input Voltage	AC 100-277 V, 50 / 60 HZ
Power Factor	>0.95
Dimming	0-10 V
Dimension	13.7" x 5.7" Φ 350 * H 145 mm
LED Quantity	1*252 pcs
Rated Power	252 W
Draw Power	200 W
PPF	460 μmol/s

## FEATURES

- High efficacy up to 2.3 μmol/J.
- IP65 Waterproof.
- Top-Bin Mid Power Wideband LEDs.
- Fanless design, no noise.
- 100-277 V wide input voltage .
- Sleek and low-profile design for a wide range of horticulture applications
- 5 Years warranty is optional.
- Superior heat dissipation from multiple heat sinks.

## CERTIFICATES

DLC / UL / CUL / CE/ RoHS

## WARRANTY


Default is 3 years. 5 years warranty is optional

## APPLICATIONS


- Home hobbyist
- Agricultural universities
- Educational programs in local school districts
- Plant physiological research
- Biotechnology
- Pharmacology
- Greenhouses
- Plant factories

Efficacy	2.3μmol/J
IP Rating	IP65
Beam Angle	60°/90° / 120°
Operating Temperature	-4 - 104 °F / (-20 - 40 °C)
Lifetime	Q (L)90: 68, 300 hours
Certificates	DLC, cULus, CE, RoHS, Damp Location Rated
Warranty	5 years
Master carton (1PC / CTN)	400 * 400 * 200 mm
Gross Weight	6 KG/PC
Volume weight	6.4 KG/PC

## SPECTRUM




A1

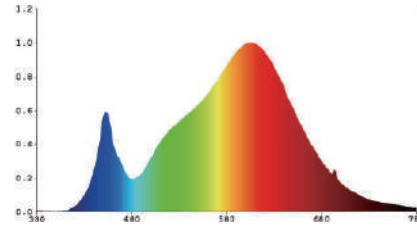

A2

## ACCESSORIES



1M IRON CHAIN



HOOK




OPTIONAL ALUMINUM  
REFLECTORS



OPTIONAL POLYCARBONATE  
DIFFUSERS

## DIMENSIONS

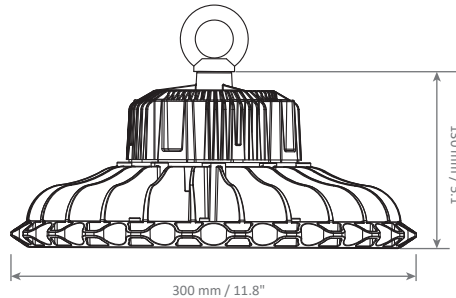

## PACKING INFORMATION

G.W.of inner carton	Size of inner box	Size of master carton	Quantity of master carton	G.W.of master carton	Storage temperature
BLANK	BLANK	400 * 400 * 200 mm	1 pc	6 KG	-40°C~80°C